

Design of 8-Element Linear Array with Practical Problem Diagnosis of Faulty Element Using Particle Swarm Optimization

Vishal Puri¹, Shaveta Puri²

¹Department of ECE, CoET , BGSB University, Rajouri, India.

Email: vishal_puri28@yahoo.com

Abstract : Design of 8 element linear array as a model set up by best particle represents the best solution found so far. At each iteration k, velocity v_{id} and position X_{id} of each particle are updated using (1) and (2).

optimization approach. The paper intends to design 8 element arrays as a satellite model and making its element defective for diagnosis. Particle swarm optimization technique is used for the purpose of diagnosis. Detection of defective element in a satellite antenna requires optimized approach. A calibration system can be used in satellite itself but in case of any failure, calibration can also be defective. So the good solution will be location of failing element from external data and optimization scheme can be used for the detection. PSO is used as a optimization tool that detects the defective element using power values that are being received.

3. Implementation

Keywords: PSO, IE3D, Linear array (LA), Cost-function.

1. Introduction.

Particle swarm Optimization is used as optimization scheme for the detection of failed element in an array. A satellite has arrays with many elements and PSO optimization technique minimizes the cost function, which is difference of power error and fundamental power equation representing defective element in terms of position.

Now when any element is completely defective PSO is used to detect the defective location values and the result is compared with already designed values in order to find the defective element.

2. PARTICLE SWARM OPTIMIZATION .

PSO is a population based iterative parallel search algorithm that models social behavior of a flock of birds. Since its introduction in [1], PSO has seen many modifications and has been adapted to different environments [2]. Many versions of PSO have been proposed and applied to solve optimization problems in diverse fields [2]. PSO consists of a population (or a swarm) of s particles, each of which represents a potential solution. The particles explore an n -dimensional solution space in search of the global solution, where n represents the number of parameters to be optimized, x and y coordinates of a node this problem. Each particle i occupies a position X_{id} and moves with a velocity V_{id} , $1 \leq i \leq s$ and $1 \leq d \leq n$. Fitness of a particle is determined from its position in the search space. The fitness is defined in such a way that a particle closer to the global solution has higher fitness value than a particle that is far away. Each particle has a memory to store $pbest_{id}$, the position where it had the highest fitness, and $gbest$, the maximum of $pbest_{id}$ of all particles. The

Let us consider a Linear array of N identical and equally oriented elements. Assuming that the elements are located over the x-y plane, the far field pattern, expressed in dB, can be calculated using the following expression [5]:

$$P(\theta, \phi) = 10 \log_{10} (fe(\theta, \phi) \cdot \sum_{n=1}^N I_n e^{jk \sin \theta (x_n \cos \phi + y_n \sin \phi)})^2$$


Where I_n is the relative excitation of the n -element located at the position given by (x_n, y_n) , $fe(\theta, \phi)$ is the element pattern, and (θ, ϕ) gives the angular position of the field point [5-7].

Using a cost function, the method compares the Error in measured radiation pattern with that corresponding to the array with a given configuration of failed/correct elements. The optimization technique used is PSO. The minimization helps in detecting failed elements.

$$J = [P_{ERROR} - P(\theta, \phi)]$$

Where J is a cost function, P_{ERROR} is the value of error. $P(\theta, \phi)$ is the value of the power pattern of element. $J = [P_{ERROR} - P(\theta, \phi)]$. The minimization of this cost function by means of PSO algorithm allows us to calculate that position where the value of error is equal to defective element power.

1. Design of 8 element Array

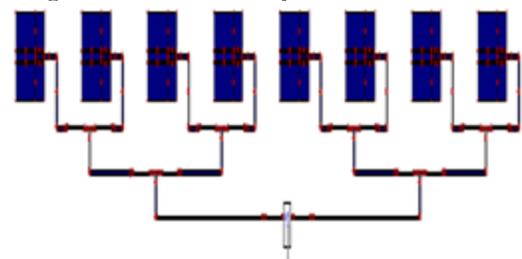

File Name	C:\Documents and Settings\patra\Desktop\New Simulation\output\8element.pat
Pattern ID	8element
Port Number	1
Frequency	1.8 (GHz)
Incident Power	0.01 (W)
Input Power	0.00434549 (W)
Radiated Power	0.000219755 (W)
Average Radiated Power	1.74876e-005 (W/s)
Radiation Efficiency	5.0571%
Antenna Efficiency	2.19755%
Conjugate Match Efficiency	2.52855%
Total Field Properties	
Gain	-1.393 dBi
Directivity	15.1876 dBi
Maximum	at (0, 10) deg.
3dB Beam Width	(12.3127, 86.7631) deg.
Conjugate Match Gain	-0.783684 dBi
Theta Field Properties	
Gain	-1.39497 dBi
Directivity	15.1856 dBi
Maximum	at (0, 20) deg.
3dB Beam Width	(0, 0) deg.
Conjugate Match Gain	-0.78565 dBi
Phi Field Properties	
Gain	-1.39497 dBi
Directivity	15.1856 dBi
Maximum	at (0, 110) deg.
3dB Beam Width	(0, 0) deg.
Conjugate Match Gain	-0.78565 dBi
Left-Hand Circular Field Properties	
Gain	-3.92164 dBi
Directivity	12.659 dBi
Maximum	at (15, 270) deg.
3dB Beam Width	(12.5126, 52.66) deg.
Conjugate Match Gain	-3.31232 dBi
Right-Hand Circular Field Properties	
Gain	-4.15536 dBi
Directivity	12.4252 dBi
Maximum	at (15, 90) deg.
3dB Beam Width	(12.4877, 53.2974) deg.

Conjugate Match Gain	-3.54605 dBi
No. 1 Port	Inc=1/0 (V), Zs=(50,0) Ohms, Zr=(50,0) Ohms
	V=0.349739/-37.2392 (V), I=0.0346905/7.00855 (A)
	Inc=1/-1.19271e-014 (V), Ref=0.751965/-163.653 (V)

Frequency	3.8 (GHz)
Incident Power	0.01 (W)
Input Power	0.00845898 (W)
Radiated Power	0.00495341 (W)
Average Radiated Power	0.00039418 (W/s)
Radiation Efficiency	58.558%
Antenna Efficiency	49.5341%
Conjugate Match Efficiency	29.279%
Total Field Properties	
Gain	12.058 dBi
Directivity	15.1089 dBi
Maximum	at (70, 90) deg.
3dB Beam Width	(9.96103, 55.7834) deg.
Conjugate Match Gain	9.77451 dBi
Theta Field Properties	
Gain	12.0502 dBi
Directivity	15.1011 dBi
Maximum	at (70, 90) deg.
3dB Beam Width	(9.94956, 55.5581) deg.
Conjugate Match Gain	9.76668 dBi
Phi Field Properties	
Gain	-1.23676 dBi

8 element Linear array is designed so x_n and y_n has specific value in the following equation,

$$P(\theta, \phi) = 10 \log_{10} (f_e(\theta, \phi) \cdot \sum_{n=1}^N I_n e^{jk \sin \theta (x_n \cos \phi + y_n \sin \phi)})^2$$

Hence for Satellite application there are two conditions.

- A. Array network working properly.
- B. Array network is damaged.

A. Array network working properly.

All the elements giving desired result and earth station gets the power which is matching with desired results, This means value of P_{ERROR} is equal to zero.

B. Array network damaged.

Earth station has far- field power pattern say P_8 when all the elements are working properly, and when there is fault in say any element & power of array is P_7

Then error is equal to

$$P_{ERROR} = P_8 - P_7$$

1. Applying Particle swarm Optimization optimization scheme.

Elements are taken and satellite array network is optimized and the optimization is working for two conditions.

2. Array working properly.

PSO when Array network working properly, In this case value of $P_8 = P_7 \cdot P_{ERROR}$ is equal to zero, meaning thereby earth station is getting desired values.

3. Array not working properly.

Particle Swarm optimization when incorporated in array network, whose element is damaged, performs cost function minimization and gives position value where defective element is located.

The minimization is related to position, which means when minimization is achieved, position is noted which is the position of defective element.

4. Data from IE3D.

IE3D is used in antenna design, using IE3D, 8 element Linear array is designed. Far-field pattern is simulated using IE3D. Data when array working properly is taken, then damaging elements one by one the far field power value is noted. The error function, which is called Last function, is minimized using PSO. Applying PSO, for minimization of cost function J.

$$J = [P_{ERROR} - P(\theta, \phi)]$$

Where,

$$P(\theta, \phi) = 10 \log_{10} \left(\sum_{n=1}^N I_n e^{jk \sin \theta (x_n \cos \phi + y_n \sin \phi)} \right)^2$$

Cost function has position parameter x_n and y_n . On minimization of cost function by PSO algorithm this leads to desired position of defective element. For testing any element is randomly made defective and the results are compared.

5. Results.

At frequency 3.8 GHz, we design 8 element Linear array and we get above data from IE3D, Radiated power from the array for various cases as designed from IE3D is as follows

ELEMENT	POWER RADIATED FROM ARRAY
ALL CORRECT.	0.00495341(W)
8 TH INCORRECT.	0.00432779(W)
7 TH INCORRECT.	0.00440877(W)
6 TH INCORRECT.	0.00465102(W)
5 TH INCORRECT.	0.00485793(W)
4 TH IN CORRECT.	0.00482747(W)
3 RD IN CORRECT.	0.00467427(W)
2 ND INCORRECT.	0.00437555(W)
1 ST INCORRECT.	0.00433651(W)

Power radiated by 8- elements for LA.

The value of error is calculated which means, (When all 8-elements are correct, radiated power)-(When a element is incorrect, radiated power.) In other words,

$$P_{ERROR} = P_{correct} - P_{defective}$$

Thus calculating the error by using the equation, we get the value of error.

ELEMENT	POWER (ERROR)
8 TH INCORRECT.	0.00062562 (W)
7 TH INCORRECT.	0.00054640(W)
6 TH INCORRECT.	0.00030239(W)
5 TH INCORRECT.	0.00009548(W)
4 TH IN CORRECT.	0.00012594(W)
3 RD IN CORRECT.	0.00027914(W)
2 ND INCORRECT.	0.00057786(W)
1 ST INCORRECT.	0.00061690(W)

Error in power fo 8 element LA.

Applying data to Particle swarm Optimization tool for Linear array.

Now the PSO we take a function which is J

$$J = [P_{ERROR} - P(\theta, \phi)] \quad P_{ERROR} =$$

Error arrived from IE3D and

$P(\theta, \phi)$ = Power equation of individual pattern.

Where

$$P(\theta, \phi) = 10 \log_{10} \left(fe(\theta, \phi) \cdot \sum_{n=1}^N I_n e^{jk \sin \theta (x_n \cos \phi + y_n \sin \phi)} \right)^2$$

This means J has a value of,

$$J = (P_{error} - 10 \log_{10} (fe(\theta, \phi) \cdot \sum_{n=1}^N I_n e^{jk \sin \theta (x_n \cos \phi + y_n \sin \phi)})^2)$$

In this equation we substitute the values of $\theta=45$, $\phi=45$, $I_n=1$, $k=1$, and then

$fe(\theta, \phi)$ Is calculated which as,

$$fe(\theta, \phi) = 10^{(-\theta/82.16)}$$

value of x_n and y_n as random position.

The aim of PSO is to minimize the value of J which means with minimization,

$$(P_{error} - 10 \log_{10} (fe(\theta, \phi) \cdot \sum_{n=1}^N I_n e^{jk \sin \theta (x_n \cos \phi + y_n \sin \phi)})^2) \cong 0$$

This means,

$$P_{error} \cong 10 \log_{10} (fe(\theta, \phi) \cdot \sum_{n=1}^N I_n e^{jk \sin \theta (x_n \cos \phi + y_n \sin \phi)})^2$$

so, PSO perform minimization and calculate position where it matches the result in this way x_n and y_n is calculated. These results are tabulated and compared when randomly a element is made defective.

The results are,

ELEMENT	POSITION(x10 ⁻¹ mm)
8 TH INCORRECT.	13.7280
7 TH INCORRECT.	14.2887
6 TH INCORRECT.	14.3418
5 TH INCORRECT.	14.0125
4 TH IN CORRECT.	13.5749
3 RD IN CORRECT.	13.6581
2 ND INCORRECT.	14.7037
1 ST INCORRECT.	14.5403

Table-6.21 Position arrived from BFA for LA. Particle Swarm Optimization results

To get started, select MATLAB Help or Demos from the Help menu.

ENTER THE VALUE OF ERROR =6.2562

Perror =

6.2562

ENTER THE VALUE OF THETA =45

theta1 =

45

fe1 =

0.2833

ENTER THE VALUE OF PHY1 =45

phy1 =
45

ENTER THE VALUE OF I1 =1

I1 =

1

ENTER THE VALUE OF kk =1

kk =

1

ans =

Fault in array

POSITIONDEFECT =

13.7280

POSITIONDEFECT =

13.7280

ENTER THE DEFECT POSITION =13.7280

ans =

```
*****FAULT IN ELEMENT
8*****
```

>>

Figure 6.9 Position and minimization values for defective element 8 for 8 element Linear array

Thus the results PSO are tabulated below.

DEFECTIVE ELEMENT	ERROR(x10 ⁻⁴)	POSITION (IE3D)	OUTPUT FROM (BFA)
D8	6.2562	13.7280	D8
D7	5.4464	14.2887	D7
D6	3.0239	14.3418	D6
D5	0.9548	14.0125	D5
D4	1.2594	13.5749	D4
D3	2.7914	14.6581	D3
D2	5.7786	14.7037	D2
D1	6.1690	14.5403	D1

Results from PSO for LA.

The results from Particle swarm optimization scheme give the position that is value of x_n and y_n , which is in accordance to minimization of cost function J. The results when compared with designed values confirms that the PSO scheme can be used to find defective element in space borne array.

3. Conclusions

The defective element detected is as desired. Thus this algorithm can be used to achieve optimization in space borne application involving numerous elements in an array. Detection of defective element using PSO tool with only far field power

values make defective element detection easy with available data.

The results suggests that the defective element detection using Particle Swarm optimization tool on basis of only far – field power values is a great boon in all space borne applications involving array.

REFERENCES

1. J. Kennedy and R. Eberhart, "Particle swarm optimization," in *Proc.IEEE Int. Conf. Neural Networks*, vol. IV, Perth, Australia, Jan. 1995,pp. 1942–1948.
2. X. Hu, Y. Shi, and R. Eberhart, "Recent advances in particle swarm," in *Proc. CEC2004 Congress on Evolutionary Computation*, vol. 1, 19–23 June 2004, pp. 90–97.

Man, Cybernetics, Part C: Applications and Reviews, IEEE Transactions vol 41, page 262-267, March 2011

4. S. Mishra, B. K. Panigrahi, M. Tripathy, A hybrid adaptive-bacterial-foraging and feedback linearization scheme based d-statcom ,*International Conference on Power System Technology .Power Con,Volume1, Issue , 21-24,Nov.2004 Vol.1 ,Page(s):275-280*
5. J.A.Rodriguez ,F.Ares ,*Finding defective elements in planar array using genetic algorithm", Progress in Electromagnetic Research , PIER 29,,2000, pages25-37.*
6. Yeo,B. and Y.Lu, *Array failure correction with a genetic algorithm, Antennas and Propagation, IEEE Transactions on Volume 47, Issue 5, May 1999 Page(s):823 – 828.*
7. T. J. Peters, *A conjugate gradient-based algorithm to minimize the side lobe level of planar arrays with element failures, IEEE Trans. Antennas Propagat., vol. 39, Oct. 1991, pp. 848-851.*

3. Raghavendra V. Kulkarni, Ganesh Kumar Venayagamoorthy, "Particle swarm optimization in wireless sensor network: A survey" *Systems,*